PrEMIer Filters

ISO 9001:2015 CERTIFIED

PF400S

3PH WYE SINGLE STAGE CHASSIS MOUNT FILTER 6A TO 50A

Operating Freq.: 50/60Hz
Usable Freq.: DC-400Hz
Max. Operating Voltage: 520VAC
Ambient Temp: -25 to 50C
Climatic Category: 25/110/21
Hipot Rating (L-G): 3500VDC
Designed to Meet UL1283/CSA22.2/EN90939 Standards

PART NUMBER / ORDERING			
MODEL	AMPS	WT TYP LBS (KG)	TERMINAL
PF400S-6-100	6	2.6 (1.2)	M5
PF400S-10-100	10	2.6 (1.2)	M5
PF400S-20-100	20	2.6 (1.2)	M5
PF400S-30-100	30	2.6 (1.2)	M5
PF400S-40-100	40	2.6 (1.2)	M5
PF400S-50-100	50	2.6 (1.2)	M5

TYPICAL INSERTION LOSS (50/50ohm)					
FREQ MHZ)	0.15	0.5	1.0	10	30
CM, dB	68	72	75	60	52
DM, dB	54	72	75	75	60

MECHANICAL

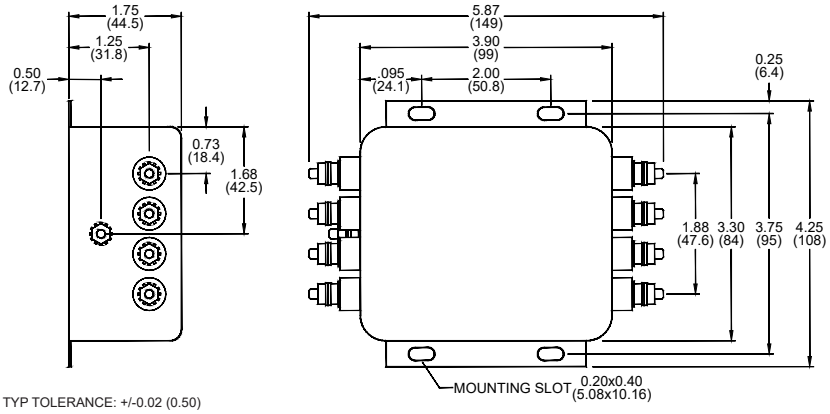

TYP TOLERANCE: +/-0.02 (0.50)

SCHEMATIC

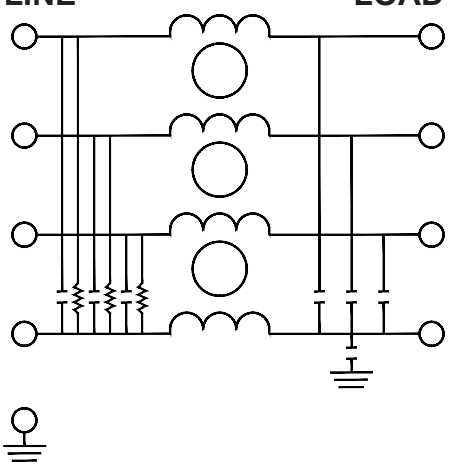

Web Site: www.premieremc.com
E-mail: info@premieremc.com Ph: 657-221-0091
Cage Code: 969R8