



PFM60S

MIL/COTS 1PH CHASSIS MOUNT FILTER 5A TO 30A

Operating Freq.: 47-400Hz

Max. Operating Voltage: 300VAC

Ambient Temp: -40 to 70C Hipot Rating (L-G): 1800VDC Typ Weight. LBS (KG): 0.5 (0.22)


Terminals: M5 Stud Leakage Current: <1mA


PART NUMBER / ORDERING				
MODEL	AMPERAGE			
PFM60S-5-10	5			
PFM60S-10-10	10			
PFM60S-15-10	15			
PFM60S-20-10	20			
PFM60S-25-10	25			
PFM60S-30-10	30			



TYPICAL INSERTION LOSS (50/50ohm)						
FREQ MHZ)	0.01	0.1	0.5	1.0	10	
CM, dB	17	33	51	50	46	
DM, dB	25	44	60	60	42	

MECHANICAL

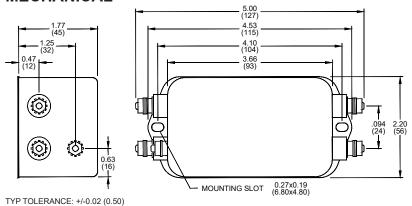



Web Site: www.premieremc.com E-mail: info@premieremc.com Ph: 657-226-0091