


PFM75S

MIL/COTS 1PH CHASSIS MOUNT FILTER 5A TO 40A


Operating Freq.: 47-400Hz
 Max. Operating Voltage: 300VAC
 Ambient Temp: -40 to 70C
 Hipot Rating (L-G): 1800VDC
 Typ Weight. LBS (KG): 1.48 (0.67)
 Terminals: M5 Stud
 Leakage Current: <3.5mA

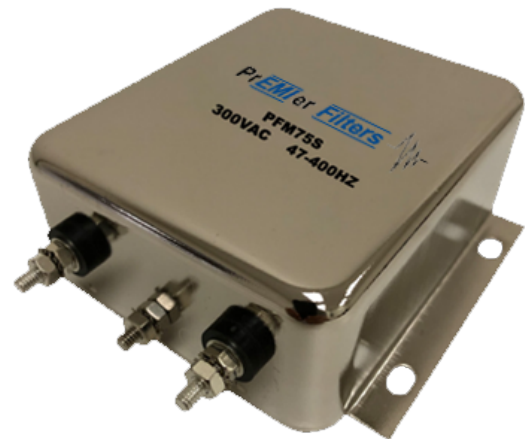

| PART NUMBER / ORDERING | |
|------------------------|----------|
| MODEL | AMPERAGE |
| PFM75S-5-22 | 5 |
| PFM75S-10-22 | 10 |
| PFM75S-15-22 | 15 |
| PFM75S-20-22 | 20 |
| PFM75S-25-22 | 25 |
| PFM75S-30-22 | 30 |
| PFM75S-40-22 | 40 |

| TYPICAL INSERTION LOSS (50/50ohm) | | | | | |
|-----------------------------------|------|-----|-----|-----|----|
| FREQ MHZ) | 0.01 | 0.1 | 0.5 | 1.0 | 10 |
| CM, dB | 19 | 34 | 54 | 52 | 50 |
| DM, dB | 24 | 44 | 62 | 60 | 47 |

MECHANICAL

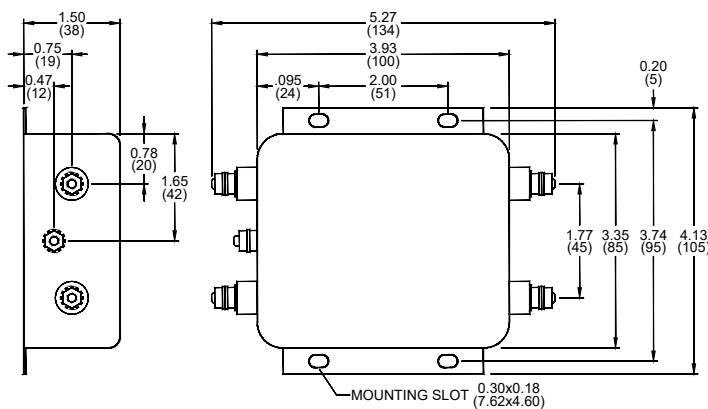

TYP TOLERANCE: +/-0.02 (0.50)

SCHEMATIC LINE

