

## PFMT232S

TEMPEST 3PH / 2PH+N (3LINE) FILTER, 10A TO 100A

Operating Freq.: 47-63Hz

Operating Voltage: 520VAC

Ambient Temp: -40 to 70C

Hipot Rating (L-G): 1250VDC

Performance: 100dB (14KHZ to 10GHZ)

Designed and manufactured in accordance with the following standards:


UL1283

Low Voltage Directive

Mil-STD-220

Mil-F-15733

PART NUMBER / ORDERING		
MODEL	AMPS	TERMINALS
PFMT232S-10	10	M5
PFMT232S-30	30	M5
PFMT232S-60	60	M5
PFMT232S-100	100	M6

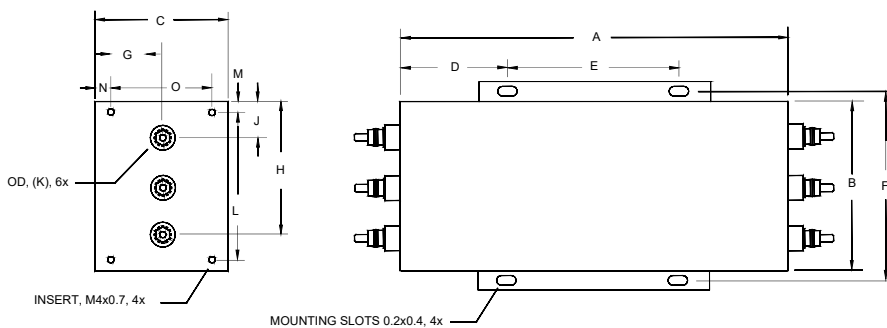

	A	B	C	D	E	F	G	H	J	K	L	M	N	O	Typ. WT, LBS(KG)
10	5	4	3	1	3	4.5	1.5	3	1	0.6	3.4	0.3	0.3	2.4	7.5 (3.4)
30	5	4	3	1	3	4.5	1.5	3	1	0.6	3.4	0.3	0.3	2.4	7.5 (3.4)
60	8	4	4	1	6	5.0	2	3	1	0.6	3.0	0.5	0.5	3.0	18 (8.2)
100	10	6	5	1	8	7.0	2.5	4.5	1.5	1.1	5.0	0.5	0.5	4.0	25 (11.4)