

PFDC100QD

COMPACT DC CHASSIS MOUNT FILTER 3A TO 16A

Max. Operating Voltage: 300VDC

Ambient Temp: -40 to 50C

Climatic Category: 40/110/21

Hipot Rating (L-G): 2700VDC

Typ Weight. LBS (KG): 0.28 (0.13)

Designed to Meet UL1283/CSA22.2/EN60939 Standards


QD Terminals IN (MM): 0.25 (6.35)



PART NUMBER / ORDERING	
MODEL	AMPERAGE
PFDC100QD-3	3
PFDC100QD-6	6
PFDC100QD-10	10
PFDC100QD-12	12
PFDC100QD-16	16

TYPICAL INSERTION LOSS (50/50ohm)					
FREQ MHZ)	0.15	0.5	1.0	10	30
CM, dB	42	46	55	50	41
DM, dB	18	27	38	60	60

MECHANICAL

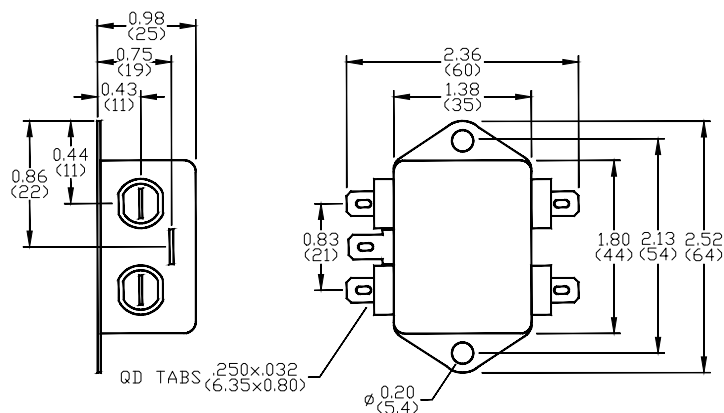

SCHEMATIC

