



PFMF370-X-3

-X IS THE AMPERAGE (200-800A)

3-LINE + GND SCIF/FACILITY FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V IN 30S

VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD


PERFORMANCE: 100dB (14KHZ TO 40GHZ)

MANUFACTURED IN ACCORDANCE WITH
THE FOLLOWING STANDARDS:

MIL-STD-220
MIL-F-15733
LV DIRECTIVE



CONFORMS TO
UL STD 1283

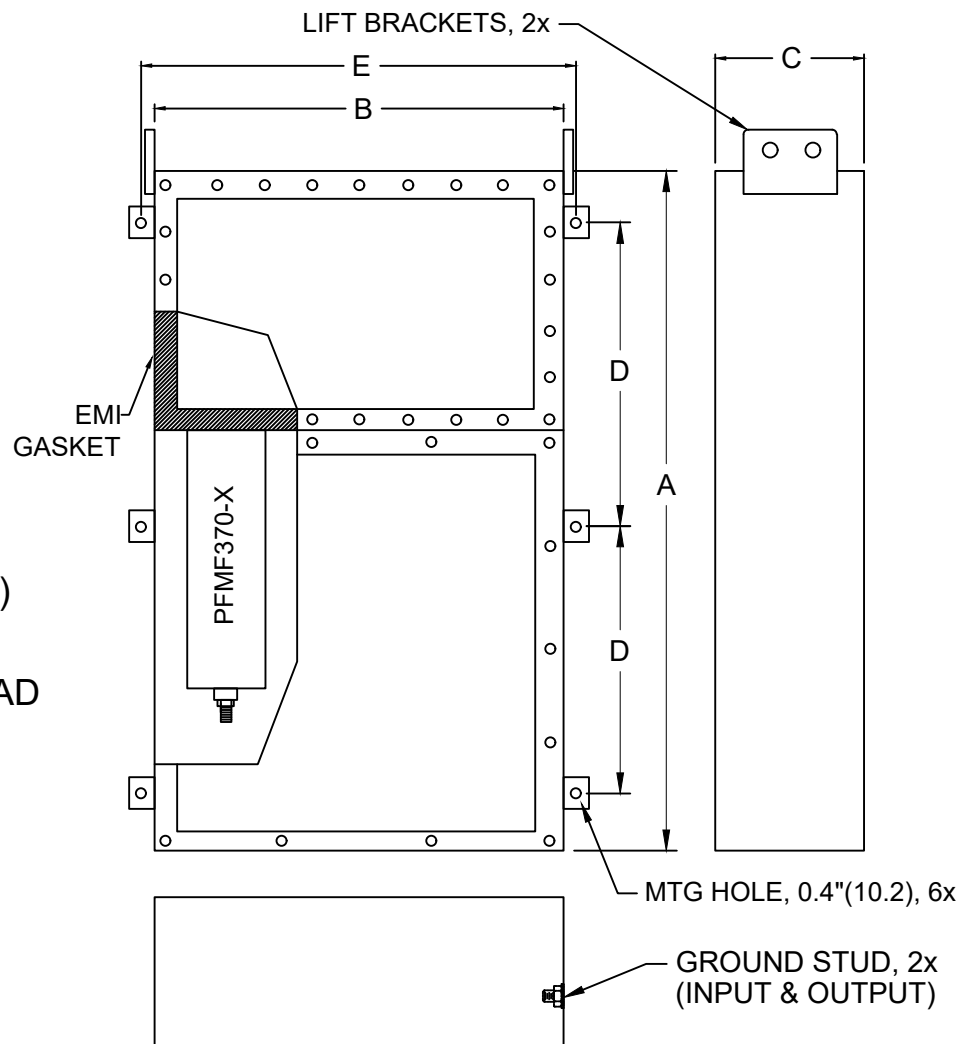

INPUT AND OUTPUT CONDUIT/WIRE PENETRATIONS BY END USER.
PREMIER CAN ADD CUTOUTS SPECIFIED AT TIME OF ORDERING.

MODEL	AMPS	TERMINAL	DIMENSIONS (MM)					WEIGHT LBS(KG)	MOUNTING LEGS (OPTIONAL)
			A	B	C	D	E		
PFMF370-200-3	200	M12	1219	685	254	559	735	460 (209)	370250ML
PFMF370-250-3	250	M12	1219	685	254	559	735	460 (209)	370250ML
PFMF370-400-3	400	DUAL M16	1422	750	380	660	800	495 (225)	370400ML
PFMF370-800-3	800	TRI M16	2032	1015	380	965	1065	685 (311)	370400ML