PrEMIer Filters

PFMF880DLT-X

WHERE X IS THE # LINES
SCIF/FACILITY DATA LINE FILTER
(E.G. 128KB DATA)
DC-300KHZ BANDPASS
150/75ohm (L-L/L-G)

SPECIFICATIONS

MAX VOLTAGE: 0-250VAC/0-250VDC
OPERATING FREQUENCY: DC-60HZ
AMBIENT TEMP.: -40 TO 65C
HIPOT (L-G): 1000VDC
PERFORMANCE: 100dB (5MHZ TO 20GHZ)

ADDITIONAL DETAILS:

1. FOR INDOOR CONTROLLED ENVIRONMENTS
2. ALL EMI SEAMS 100% WELDED
3. FOR DIFFERENT CONDUIT CUTOUT OR HOLE LOCATION, CONSULT FACTORY

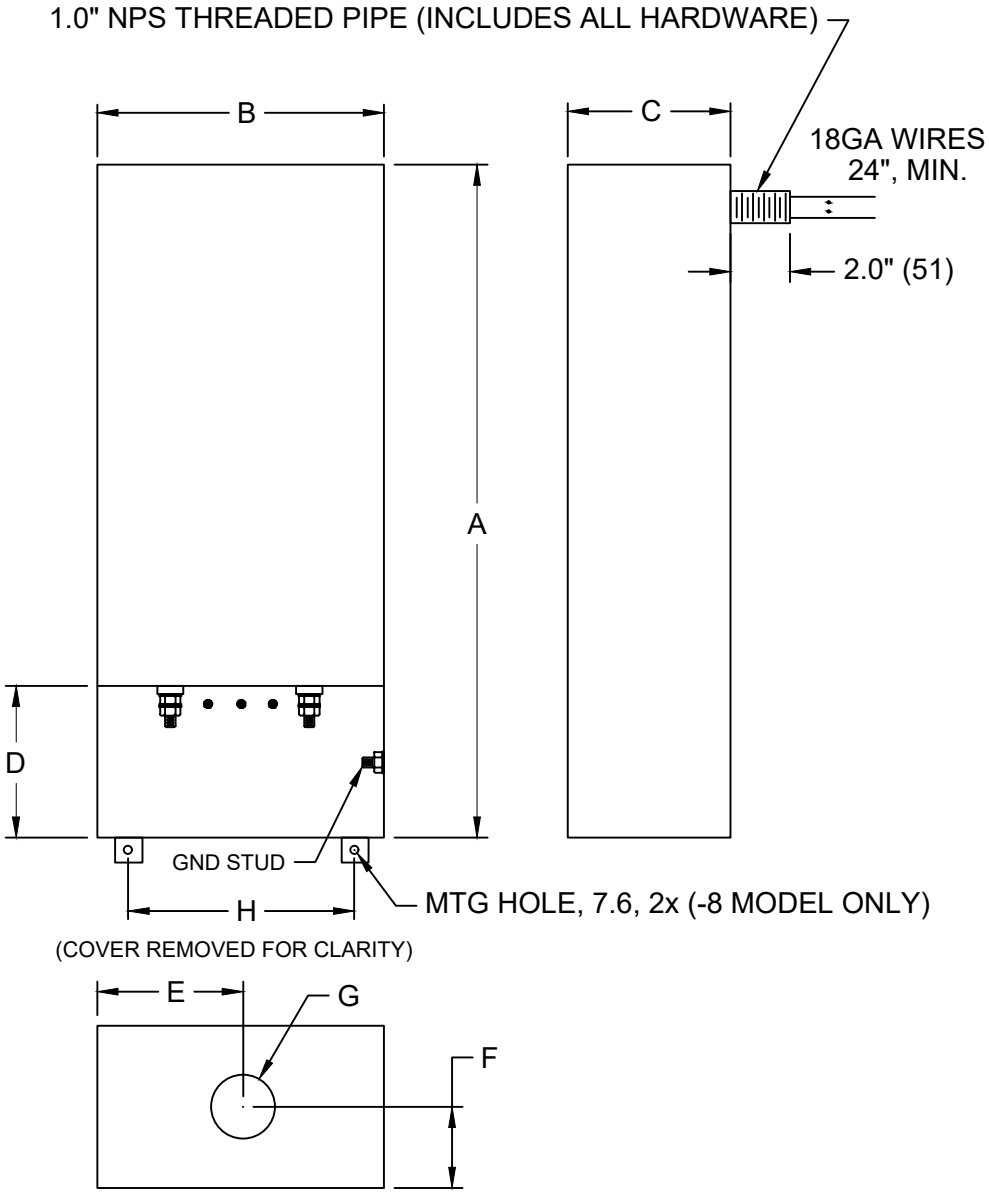

MODEL / PN	# LINES	AMPS	TERMINALS		DIMENSIONS (MM)								WEIGHT LBS(KG)
			LINE	LOAD	A	B	C	D	E	F	G	H	
PFMF880DLT-2	2	4	M5	18GA WIRES	305	89	63.5	76	44.5	32	22	NA	8 (3.6)
PFMF880DLT-4	4	4	M5	18GA WIRES	305	127	63.5	76	63.5	32	22	NA	11 (5)
PFMF880DLT-8	8	4	M5	18GA WIRES	305	254	63.5	89	127	32	22	203	15 (6.8)

SPECIFICATIONS SUBJECT TO CHANGE