

PFMF890DLT-X
 WHERE X IS THE # LINES
 SCIF/FACILITY DATA LINE FILTER
 (TELEPHONE / VOICE)
 DC-15KHZ BANDPASS
 600/300ohm (L-L/L-G)


SPECIFICATIONS

MAX VOLTAGE: 0-250VAC/0-250VDC
 OPERATING FREQUENCY: DC-60HZ
 AMBIENT TEMP.: -40 TO 65C
 HIPOT (L-G): 1000VDC
 PERFORMANCE: 100dB (120KHZ TO 20GHZ)

ADDITIONAL DETAILS:

1. FOR INDOOR CONTROLLED ENVIRONMENTS
2. ALL EMI SEAMS 100% WELDED
3. FOR DIFFERENT CONDUIT CUTOUT OR HOLE LOCATION, CONSULT FACTORY

1.0" NPS THREADED PIPE (INCLUDES ALL HARDWARE)

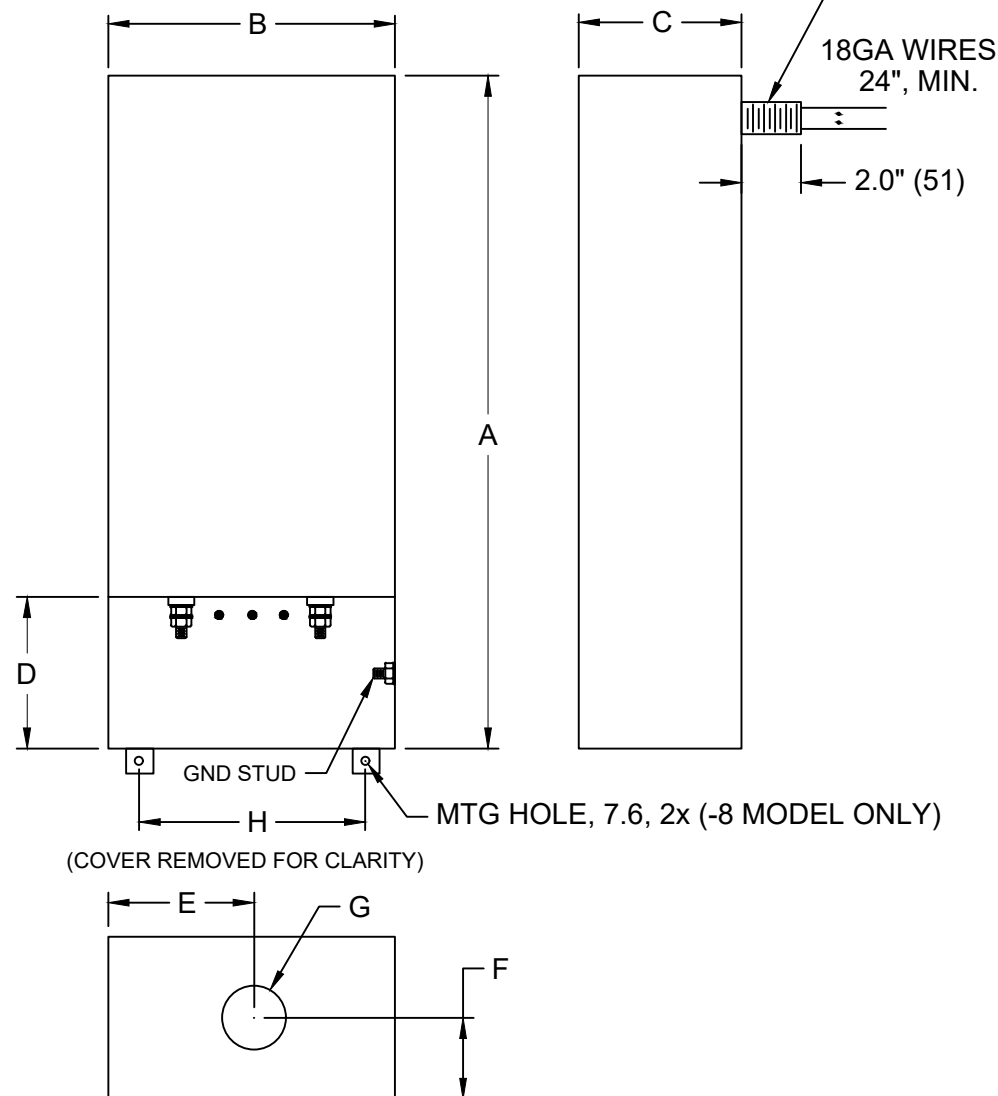

MODEL / PN	# LINES	AMPS	TERMINALS		DIMENSIONS (MM)								WEIGHT LBS(KG)
			LINE	LOAD	A	B	C	D	E	F	G	H	
PFMF890DLT-2	2	1	M5	18GA WIRES	305	89	63.5	76	44.5	32	22	NA	8 (3.6)
PFMF890DLT-4	4	1	M5	18GA WIRES	305	127	63.5	76	63.5	32	22	NA	11 (5)
PFMF890DLT-8	8	1	M5	18GA WIRES	305	254	63.5	89	127	32	22	203	15 (6.8)